


MOU




ailis

MOU

MOU
LUCE in movimento

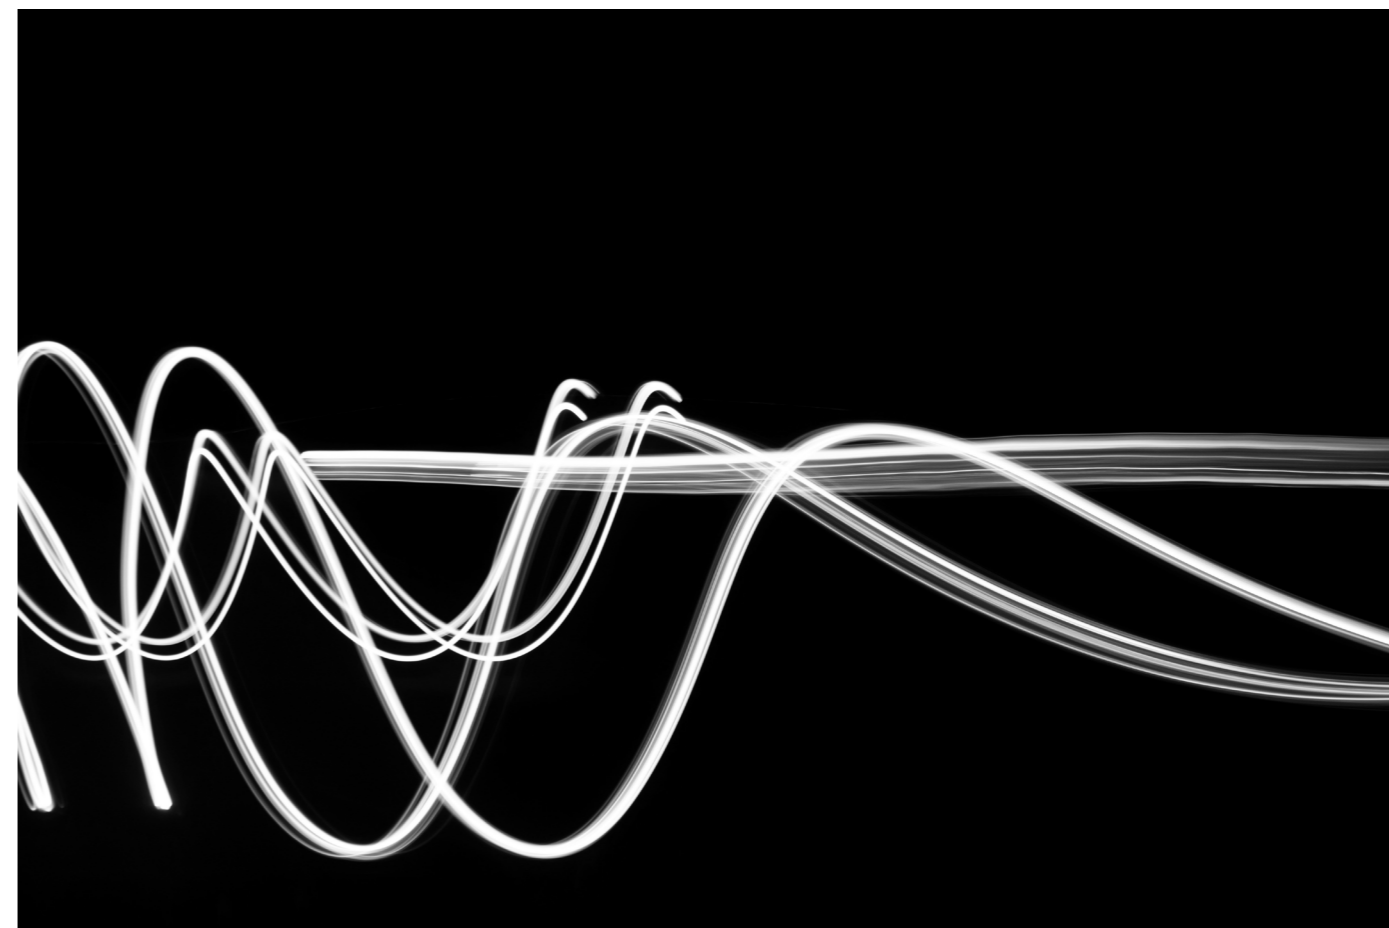

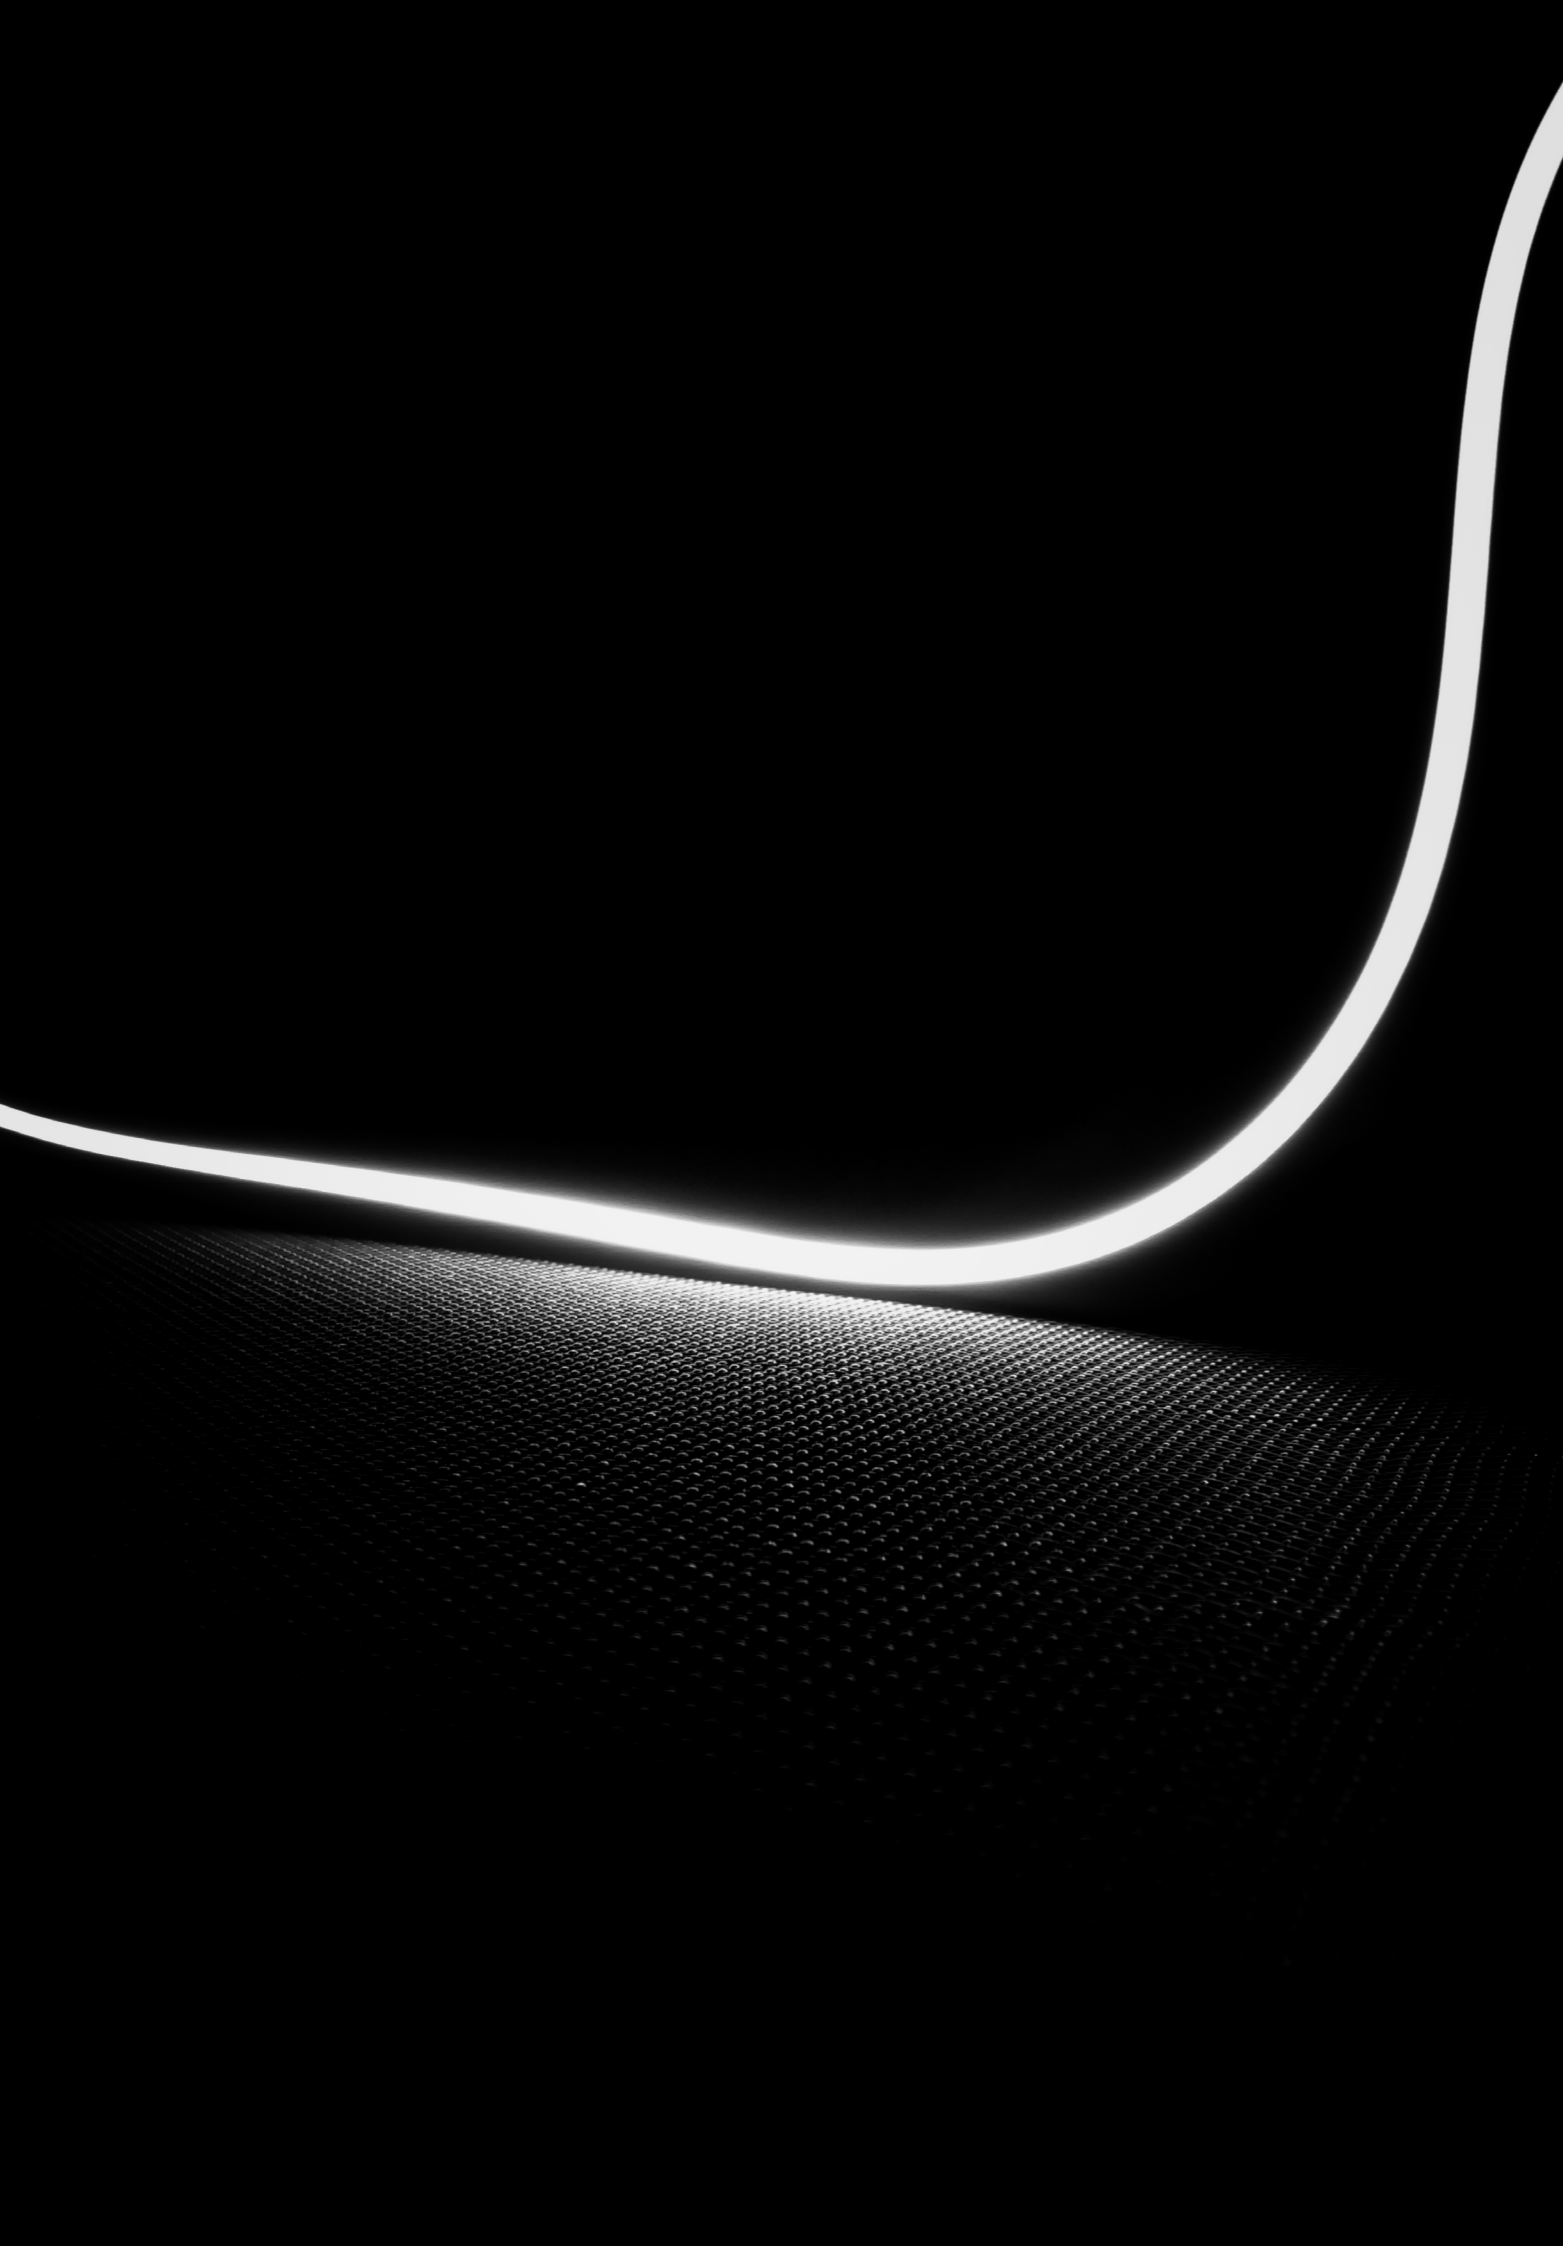

MOU 0612

Bright line.

In silicone material.

Section 6 x 12 mm.

Very flexible, it can take various shapes with curves and counter-curves even of small radius.

Soft and sinuous LIGHT easily adaptable to any decorative solution.

Light emission on the plane of curvature.

Supplied to measure.

Product certified by our laboratory.

Led with high luminous efficiency.

Color rendering index CRI >90.

Anti-yellowing treatment.

Resistance to high and low temperatures.

Suitable for use in indoor and outdoor environments.

Custom designed anchoring systems.

Power supply not included.

ON-OFF

Dimmable DALI, ZigBee, CASAMBI, PUSH 0-10V, 1-10V.




INSTALLATION	FREE-STANDING
FINISH	WT WHITE
VOLTAGE	24V DC
PROTECTION LEVEL	IP 40 / IP 68
PROTECTION CLASS	III
POWER PER METER	6W/M 12W/M 18WM-RGB
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K 3000K 4000K
BEAM ANGLE	140°
LUMINOUS FLUX PER METER	SEE NEXT PAGE

COLOUR RENDERING INDEX	CRI > 90
COLOUR TOLERANCE SDCM	2
DIMMING	DALI, ZigBee, CASAMBI, PUSH, 0-10 V, 1-10 V
SECTION DIMENSIONS	6 X 12 MM
MATERIALS	SILICONE MATERIAL
WARRANTY	10 YEARS

IT 07/2022 ailis srl Updated technical content.
Subject to changes.

140° BEAM



- UNI EN 12464-1-2
- CEI EN 60598-1
- CEI EN 62031
- CEI EN 62471
- CEI EN 55015
- CEI EN 61547
- CEI EN 61000 -3-2
- CEI EN 61000-3-3
- CEI EN 50581-2012

LINEE / LINES




ITEM	W/m	LUMEN/m	FWHM	COLOR TEMPERATURE	PROTECTION LEVEL	DRIVER	PRICE AT CENTIMETER WITHOUT VAT
MOU-40-O-0612-24-06-2700K	6 W/m	440	140°	2700 K	IP 40	Remote, not included (*)	€ 0,80
MOU-40-O-0612-24-06-3000K	6 W/m	450	140°	3000 K	IP 40	Remote, not included (*)	€ 0,80
MOU-40-O-0612-24-06-4000K	6 W/m	460	140°	4000 K	IP 40	Remote, not included (*)	€ 0,80
MOU-40-O-0612-24-12-2200K	12 W/m	720	140°	2200 K	IP 40	Remote, not included (*)	€ 1,10
MOU-40-O-0612-24-12-2700K	12 W/m	855	140°	2700 K	IP 40	Remote, not included (*)	€ 0,90
MOU-40-O-0612-24-12-3000K	12 W/m	920	140°	3000 K	IP 40	Remote, not included (*)	€ 0,90
MOU-40-O-0612-24-12-4000K	12 W/m	990	140°	4000 K	IP 40	Remote, not included (*)	€ 0,90
MOU-40-O-0612-24-18-RGB	18 W/m	880	140°	-	IP 40	Remote, not included (*)	€ 1,10

LINEE / LINES



ITEM	W/m	LUMEN/m	FWHM	COLOR TEMPERATURE	PROTECTION LEVEL	DRIVER	PRICE AT CENTIMETER WITHOUT VAT
MOU-68-O-0612-24-06-2700K	6 W/m	440	140°	2700 K	IP 68	Remote, not included (*)	€ 1,00
MOU-68-O-0612-24-06-3000K	6 W/m	450	140°	3000 K	IP 68	Remote, not included (*)	€ 1,00
MOU-68-O-0612-24-06-4000K	6 W/m	460	140°	4000 K	IP 68	Remote, not included (*)	€ 1,00
MOU-68-O-0612-24-12-2200K	12 W/m	720	140°	2200 K	IP 68	Remote, not included (*)	€ 1,20
MOU-68-O-0612-24-12-2700K	12 W/m	855	140°	2700 K	IP 68	Remote, not included (*)	€ 1,10
MOU-68-O-0612-24-12-3000K	12 W/m	920	140°	3000 K	IP 68	Remote, not included (*)	€ 1,10
MOU-68-O-0612-24-12-4000K	12 W/m	990	140°	4000 K	IP 68	Remote, not included (*)	€ 1,10
MOU-68-O-0612-24-18-RGB	18 W/m	880	140°	-	IP 68	Remote, not included (*)	€ 1,30

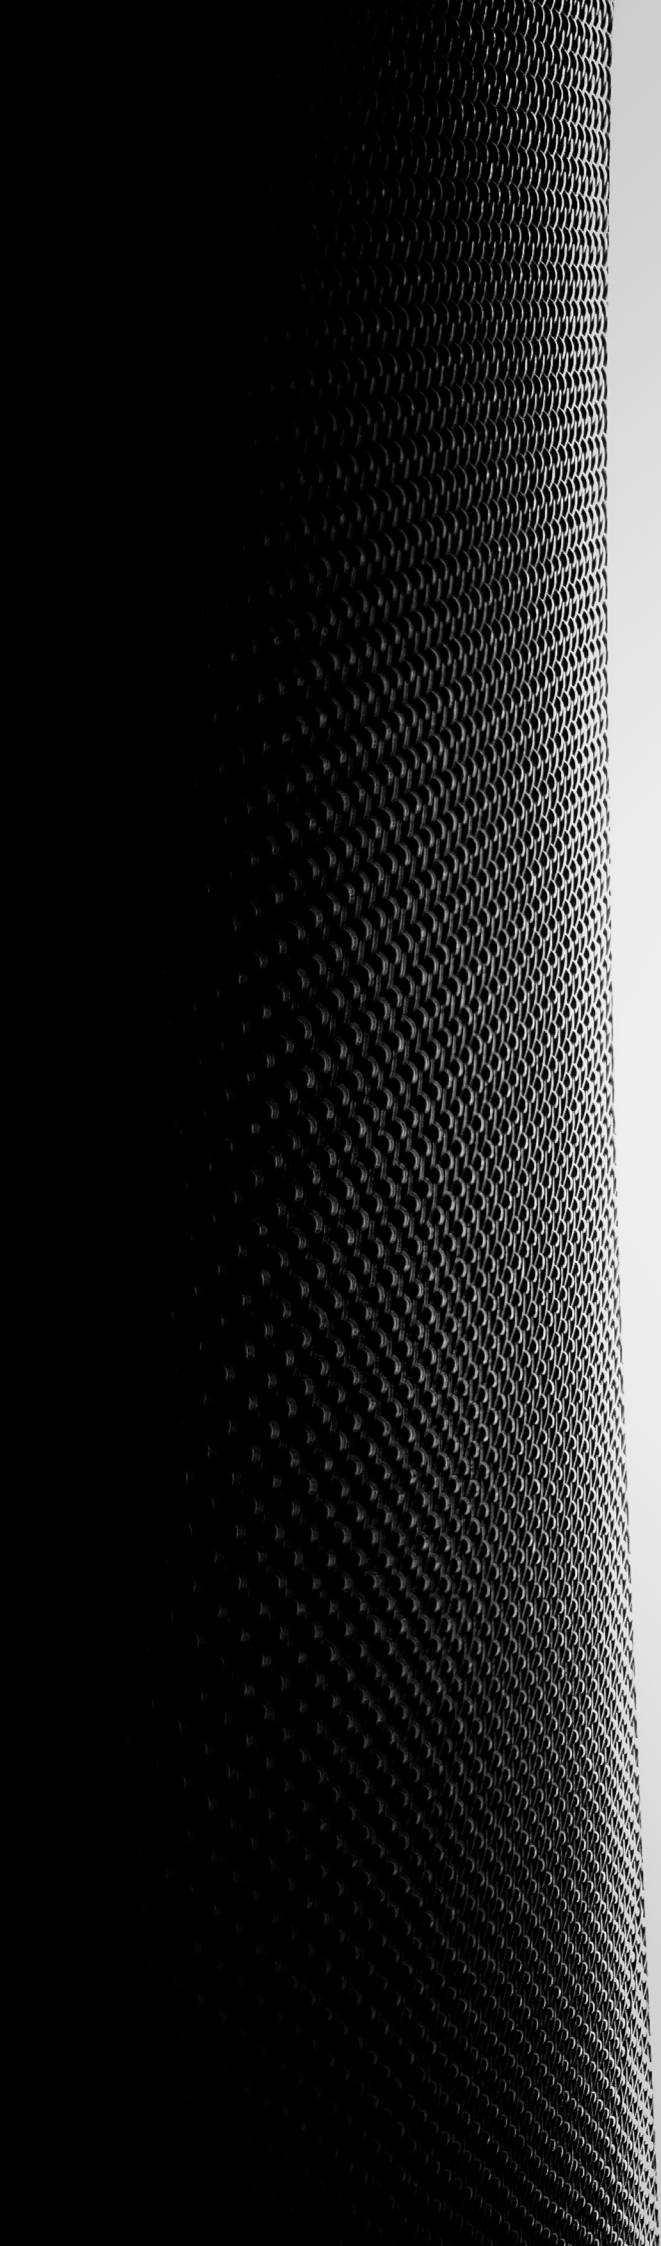

MOU 1018

Bright line.

In silicone material.

Section 10 x 18 mm.

Very flexible, it can take various shapes with curves and counter-curves even of small radius.

Soft and sinuous LIGHT easily adaptable to any decorative solution.

Light emission on the plane of curvature.

Supplied to measure.

Product certified by our laboratory.

Led with high luminous efficiency.

Color rendering index CRI >90.

Anti-yellowing treatment.

Resistance to high and low temperatures.

Suitable for use in indoor and outdoor environments.

Custom designed anchoring systems.

Power supply not included.

ON-OFF

Dimmable DALI, ZigBee, CASAMBI, PUSH 0-10V, 1-10V.

MOU 1018




INSTALLATION	FREE-STANDING
FINISH	WT WHITE
VOLTAGE	24V DC
PROTECTION LEVEL	IP 40 / IP 68
PROTECTION CLASS	III
POWER PER METER	6W/M 12W/M 18WM-RGB
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K 3000K 4000K
BEAM ANGLE	140°
LUMINOUS FLUX PER METER	SEE NEXT PAGE

COLOUR RENDERING INDEX	CRI > 90
COLOUR TOLERANCE SDCM	2
DIMMING	DALI, ZigBee, CASAMBI, PUSH, 0-10 V, 1-10 V
SECTION DIMENSIONS	10 X 18 mm
MATERIALS	SILICONE MATERIAL
WARRANTY	10 YEARS

IT 07/2022 ailis srl Updated technical content. Subject to changes.

140° BEAM

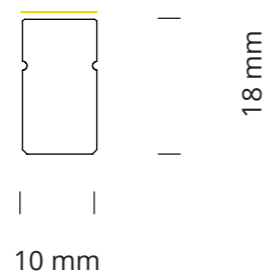

- UNI EN 12464-1-2
- CEI EN 60598-1
- CEI EN 62031
- CEI EN 62471
- CEI EN 55015
- CEI EN 61547
- CEI EN 61000 -3-2
- CEI EN 61000-3-3
- CEI EN 50581-2012

LINEE / LINES




ITEM	W/m	LUMEN/m	FWHM	COLOR TEMPERATURE	PROTECTION LEVEL	DRIVER	PRICE AT CENTIMETER WITHOUT VAT
MOU-40-O-1018-24-06-2700K	6 W/m	440	140°	2700 K	IP 40	Remote, not included (*)	€ 0,80
MOU-40-O-1018-24-06-3000K	6 W/m	450	140°	3000 K	IP 40	Remote, not included (*)	€ 0,80
MOU-40-O-1018-24-06-4000K	6 W/m	460	140°	4000 K	IP 40	Remote, not included (*)	€ 0,80
MOU-40-O-1018-24-12-2200K	12 W/m	720	140°	2200 K	IP 40	Remote, not included (*)	€ 1,10
MOU-40-O-1018-24-12-2700K	12 W/m	855	140°	2700 K	IP 40	Remote, not included (*)	€ 0,90
MOU-40-O-1018-24-12-3000K	12 W/m	920	140°	3000 K	IP 40	Remote, not included (*)	€ 0,90
MOU-40-O-1018-24-12-4000K	12 W/m	990	140°	4000 K	IP 40	Remote, not included (*)	€ 0,90
MOU-40-O-1018-24-18-RGB	18 W/m	880	140°	-	IP 40	Remote, not included (*)	€ 1,10

LINEE / LINES



ITEM	W/m	LUMEN/m	FWHM	COLOR TEMPERATURE	PROTECTION LEVEL	DRIVER	PRICE AT CENTIMETER WITHOUT VAT
MOU-68-O-1018-24-06-2700K	6 W/m	440	140°	2700 K	IP 68	Remote, not included (*)	€ 1,00
MOU-68-O-1018-24-06-3000K	6 W/m	450	140°	3000 K	IP 68	Remote, not included (*)	€ 1,00
MOU-68-O-1018-24-06-4000K	6 W/m	460	140°	4000 K	IP 68	Remote, not included (*)	€ 1,00
MOU-68-O-1018-24-12-2200K	12 W/m	720	140°	2200 K	IP 68	Remote, not included (*)	€ 1,20
MOU-68-O-1018-24-12-2700K	12 W/m	855	140°	2700 K	IP 68	Remote, not included (*)	€ 1,10
MOU-68-O-1018-24-12-3000K	12 W/m	920	140°	3000 K	IP 68	Remote, not included (*)	€ 1,10
MOU-68-O-1018-24-12-4000K	12 W/m	990	140°	4000 K	IP 68	Remote, not included (*)	€ 1,10
MOU-68-O-1018-24-18-RGB	18 W/m	880	140°	-	IP 68	Remote, not included (*)	€ 1,30

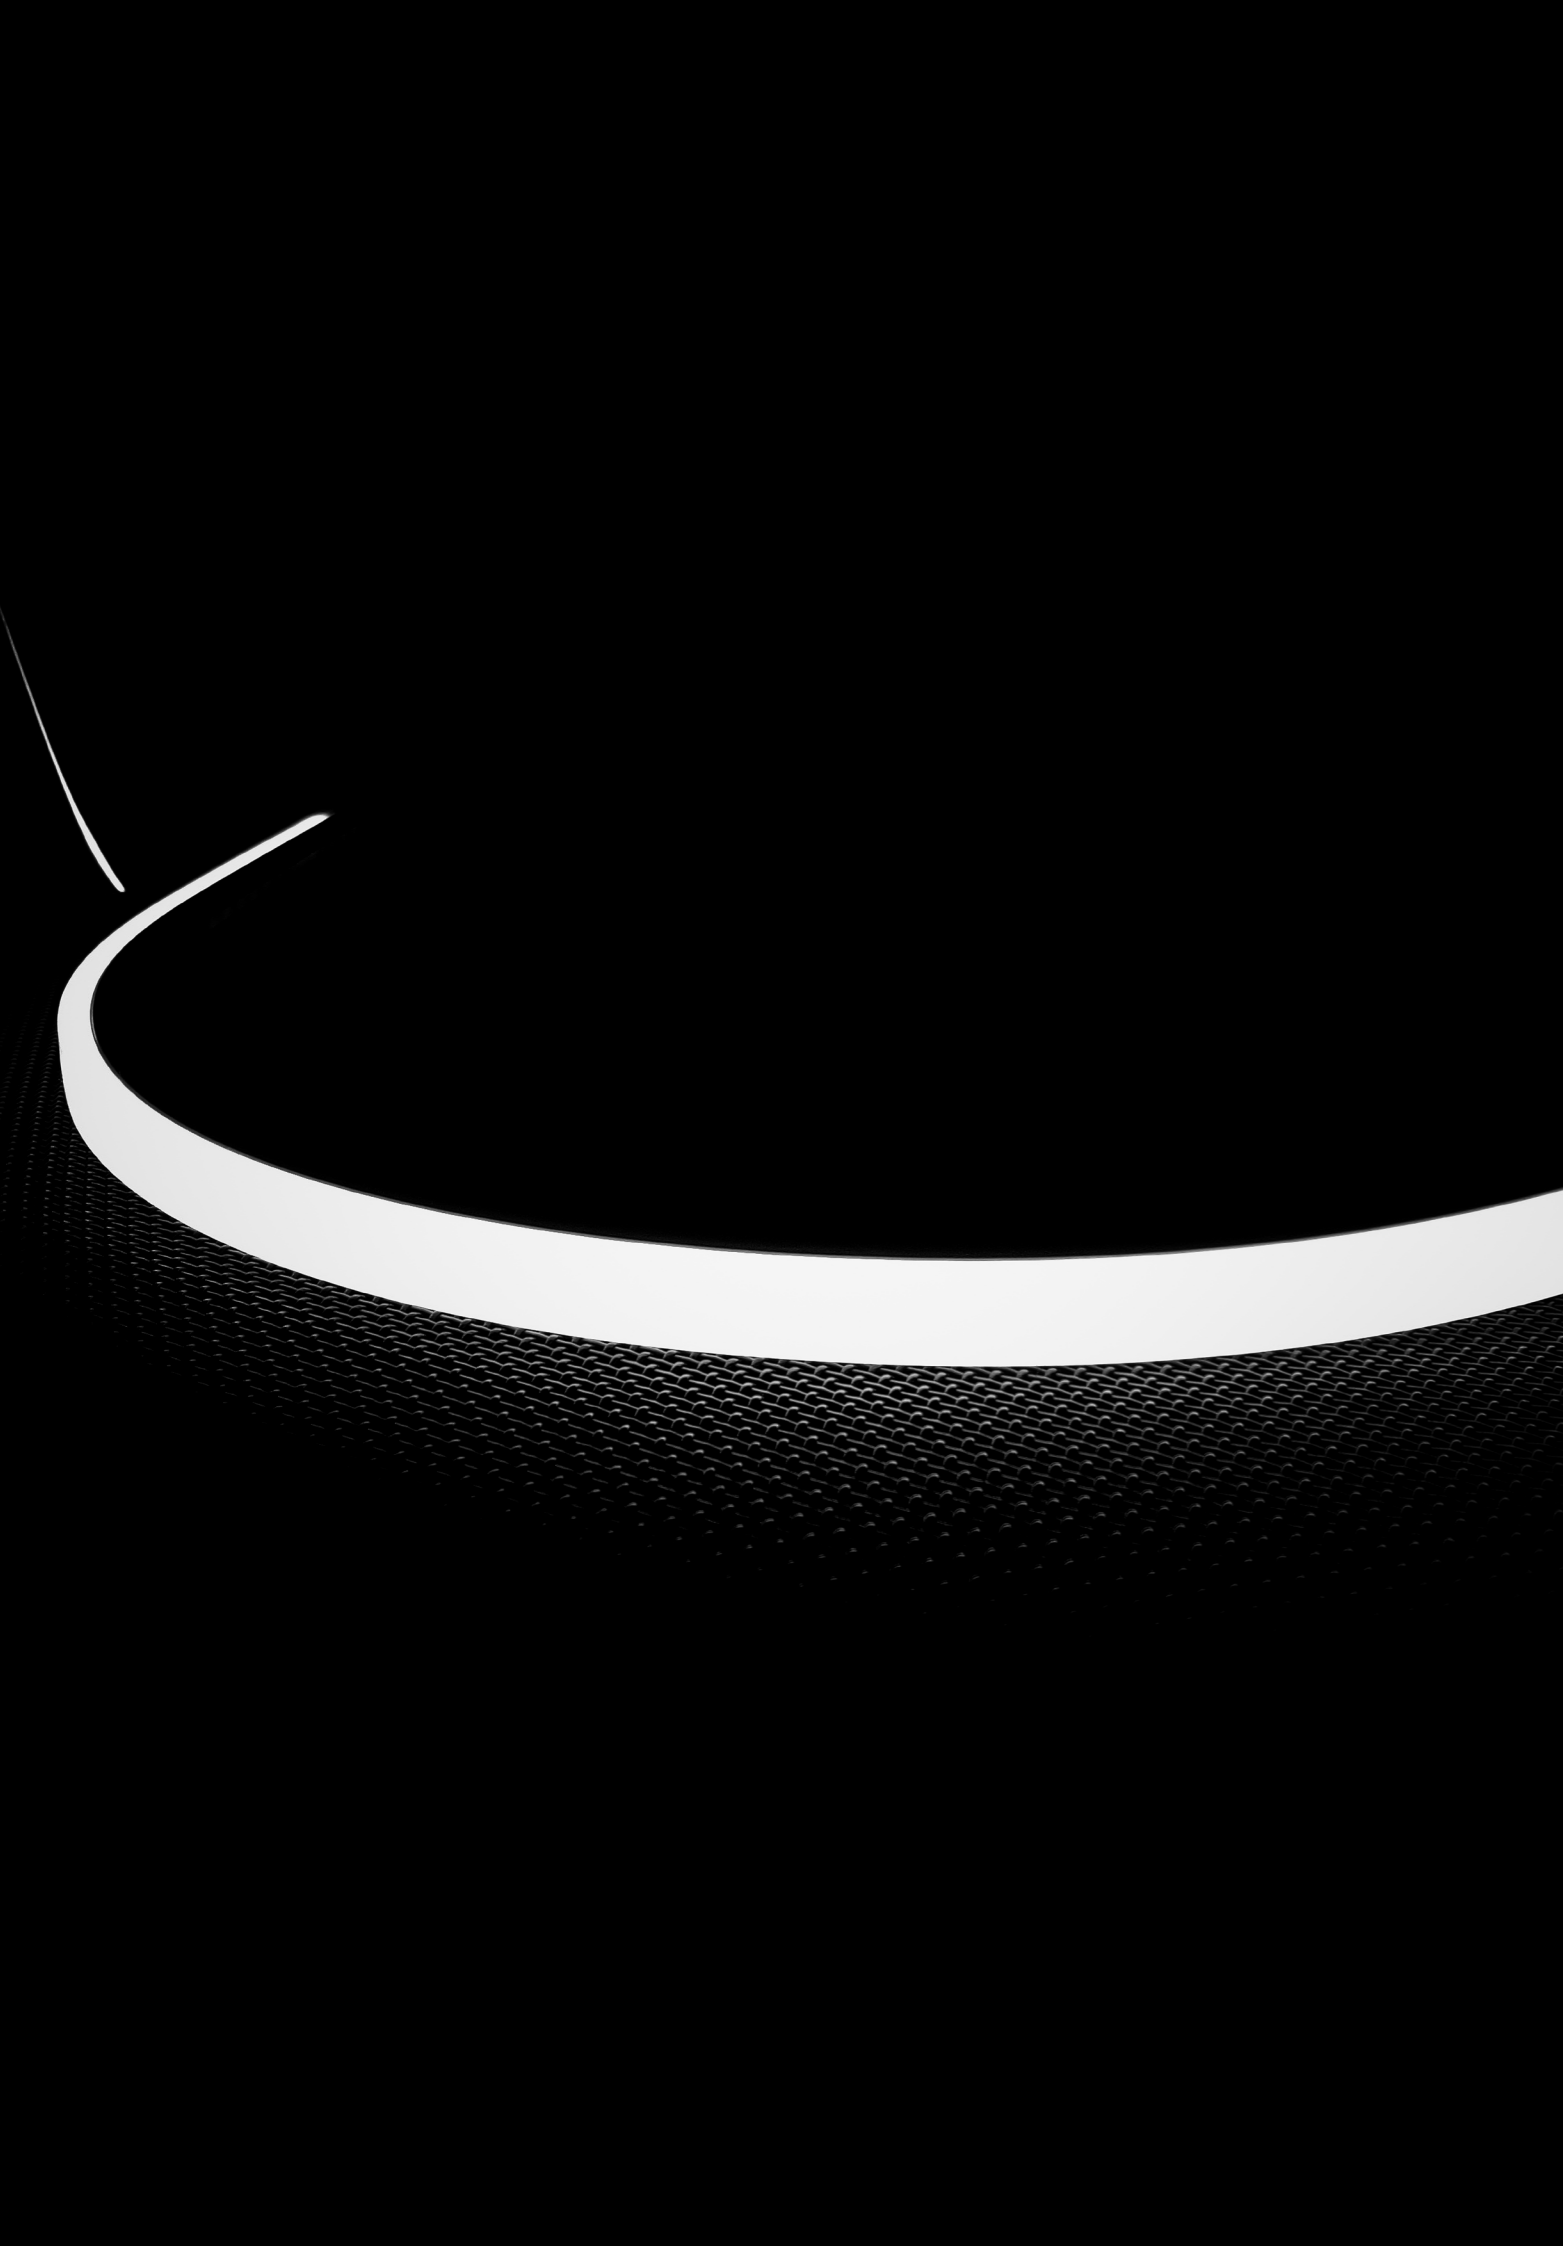

MOU 1212

Bright line.

In silicone material.

Section 12 x 12 mm.

Very flexible, it can take various shapes with curves and counter-curves even of small radius.

Soft and sinuous LIGHT easily adaptable to any decorative solution.

Curvature on the plane orthogonal to the emission plane.

Supplied to measure.

Product certified by our laboratory.

Led with high luminous efficiency.

Color rendering index CRI >90.

Anti-yellowing treatment.

Resistance to high and low temperatures.

Suitable for use in indoor and outdoor environments.

Custom designed anchoring systems.

Power supply not included.

ON-OFF

Dimmable DALI, ZigBee, CASAMBI, PUSH 0-10V, 1-10V.

MOU 1212




INSTALLATION	FREE-STANDING
FINISH	WT WHITE
VOLTAGE	24V DC
PROTECTION LEVEL	IP 40 / IP 68
PROTECTION CLASS	III
POWER PER METER	6W/M 12W/M 18WM-RGB
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K 3000K 4000K
BEAM ANGLE	140°
LUMINOUS FLUX PER METER	SEE NEXT PAGE

COLOUR RENDERING INDEX	CRI > 90
COLOUR TOLERANCE SDCM	2
DIMMING	DALI, ZigBee, CASAMBI, PUSH, 0-10 V, 1-10 V
SECTION DIMENSIONS	12 X 12mm
MATERIALS	SILICONE MATERIAL
WARRANTY	10 YEARS

IT 07/2022 ailis srl Updated technical content.
Subject to changes.

140° BEAM



- UNI EN 12464-1-2
- CEI EN 60598-1
- CEI EN 62031
- CEI EN 62471
- CEI EN 55015
- CEI EN 61547
- CEI EN 61000 -3-2
- CEI EN 61000-3-3
- CEI EN 50581-2012

LINEE / LINES



ITEM	W/m	LUMEN/m	FWHM	COLOR TEMPERATURE	PROTECTION LEVEL	DRIVER	PRICE AT CENTIMETER WITHOUT VAT
MOU-40-V-1212-24-06-2700K	6 W/m	440	140°	2700 K	IP 40	Remote, not included (*)	€ 0,80
MOU-40-V-1212-24-06-3000K	6 W/m	450	140°	3000 K	IP 40	Remote, not included (*)	€ 0,80
MOU-40-V-1212-24-06-4000K	6 W/m	460	140°	4000 K	IP 40	Remote, not included (*)	€ 0,80
MOU-40-V-1212-24-12-2200K	12 W/m	720	140°	2200 K	IP 40	Remote, not included (*)	€ 1,10
MOU-40-V-1212-24-12-2700K	12 W/m	855	140°	2700 K	IP 40	Remote, not included (*)	€ 0,90
MOU-40-V-1212-24-12-3000K	12 W/m	920	140°	3000 K	IP 40	Remote, not included (*)	€ 0,90
MOU-40-V-1212-24-12-4000K	12 W/m	990	140°	4000 K	IP 40	Remote, not included (*)	€ 0,90
MOU-40-V-1212-24-18-RGB	18 W/m	880	140°	-	IP 40	Remote, not included (*)	€ 1,10

LINEE / LINES



ITEM	W/m	LUMEN/m	FWHM	COLOR TEMPERATURE	PROTECTION LEVEL	DRIVER	PRICE AT CENTIMETER WITHOUT VAT
MOU-68-V-1212-24-06-2700K	6 W/m	440	140°	2700 K	IP 68	Remote, not included (*)	€ 1,00
MOU-68-V-1212-24-06-3000K	6 W/m	450	140°	3000 K	IP 68	Remote, not included (*)	€ 1,00
MOU-68-V-1212-24-06-4000K	6 W/m	460	140°	4000 K	IP 68	Remote, not included (*)	€ 1,00
MOU-68-V-1212-24-12-2200K	12 W/m	720	140°	2200 K	IP 68	Remote, not included (*)	€ 1,20
MOU-68-V-1212-24-12-2700K	12 W/m	855	140°	2700 K	IP 68	Remote, not included (*)	€ 1,10
MOU-68-V-1212-24-12-3000K	12 W/m	920	140°	3000 K	IP 68	Remote, not included (*)	€ 1,10
MOU-68-V-1212-24-12-4000K	12 W/m	990	140°	4000 K	IP 68	Remote, not included (*)	€ 1,10
MOU-40-V-1212-24-18-RGB	18 W/m	880	140°	-	IP 68	Remote, not included (*)	€ 1,30



ailis illuminazione

Via Marsan, 15/A
36063 Marostica
Vicenza Italy
T+39 04241948109
info@ailis.it
WWW.AILIS.IT