


SQUARE 1


datasheet / scheda tecnica



Installation	Pending	Installazione	Sospensione
Protection level	IP20 / protection class II	Grado di protezione	IP20 / classe isolamento II
Color temperature	4000K natural white 2700K warm white	Temp. colore	4000K bianco naturale 2700K bianco caldo
Lumious flux	1200 lumen (4000K) 1000 lumen (2700K)	Flusso Luminoso	1200 lumen (4000K) 1000 lumen (2700K)
CRI (Ra)	80 - 90	CRI (Ra)	80 - 90
LED life	> 100.000 hours	Vita dei LED	> 100.000 ore
Dimensions	380x380x12 mm	Dimensioni	380x380x12 mm
Weight	3,0 Kg	Peso	3,0 Kg
Materials	Anodized aluminum Painted steel Poly(methyl methacrylate) optics PMMA	Materiali	Alluminio anodizzato Acciaio verniciato Ottiche in polimetilmetacrilato PMMA
Power consumption	13 W	Potenza assorbita	13 W
Power supply	230 Vac	Alimentazione	230 Vac
Color	Opaque Black, Ailis White, Rust	Colore	Nero Opaco, Bianco Ailis, Ruggine
Optics	65° FWHM	Ottiche	65° FWHM
Working temperature	Environment working temperature from -35° to + 45°	Temperatura esercizio	Temperatura ambiente di funzionamento da -35° a + 45°
Norms	CEI EN60598-1, CEI EN62031, CEI EN 62471, CEI EN 55015, CEI EN61547, CEI EN 61000-3-2, CEI EN 61000-3-3, CEI EN50581-2012 Can be installed on flammable surfaces	Normative	CEI EN60598-1, CEI EN62031, CEI EN 62471, CEI EN 55015, CEI EN61547, CEI EN 61000-3-2, CEI EN 61000-3-3, CEI EN50581-2012 Installabile su superfici normalmente infiammabili
Warranty	5 years	Garanzia	5 anni

SQUARE 1

datasheet / scheda tecnica

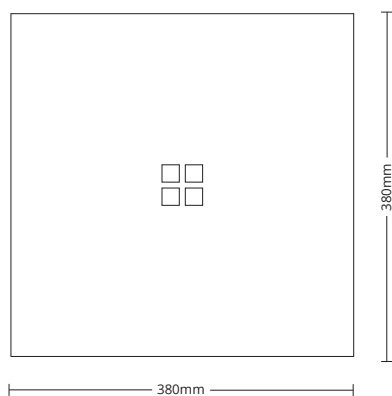

65° FWHM

